

## 1. Description


### 1.1. Project

Project Name	LedAndButtonTest
Board Name	LedAndButtonTest
Generated with:	STM32CubeMX 4.19.0
Date	02/11/2017

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

## 2. Pinout Configuration

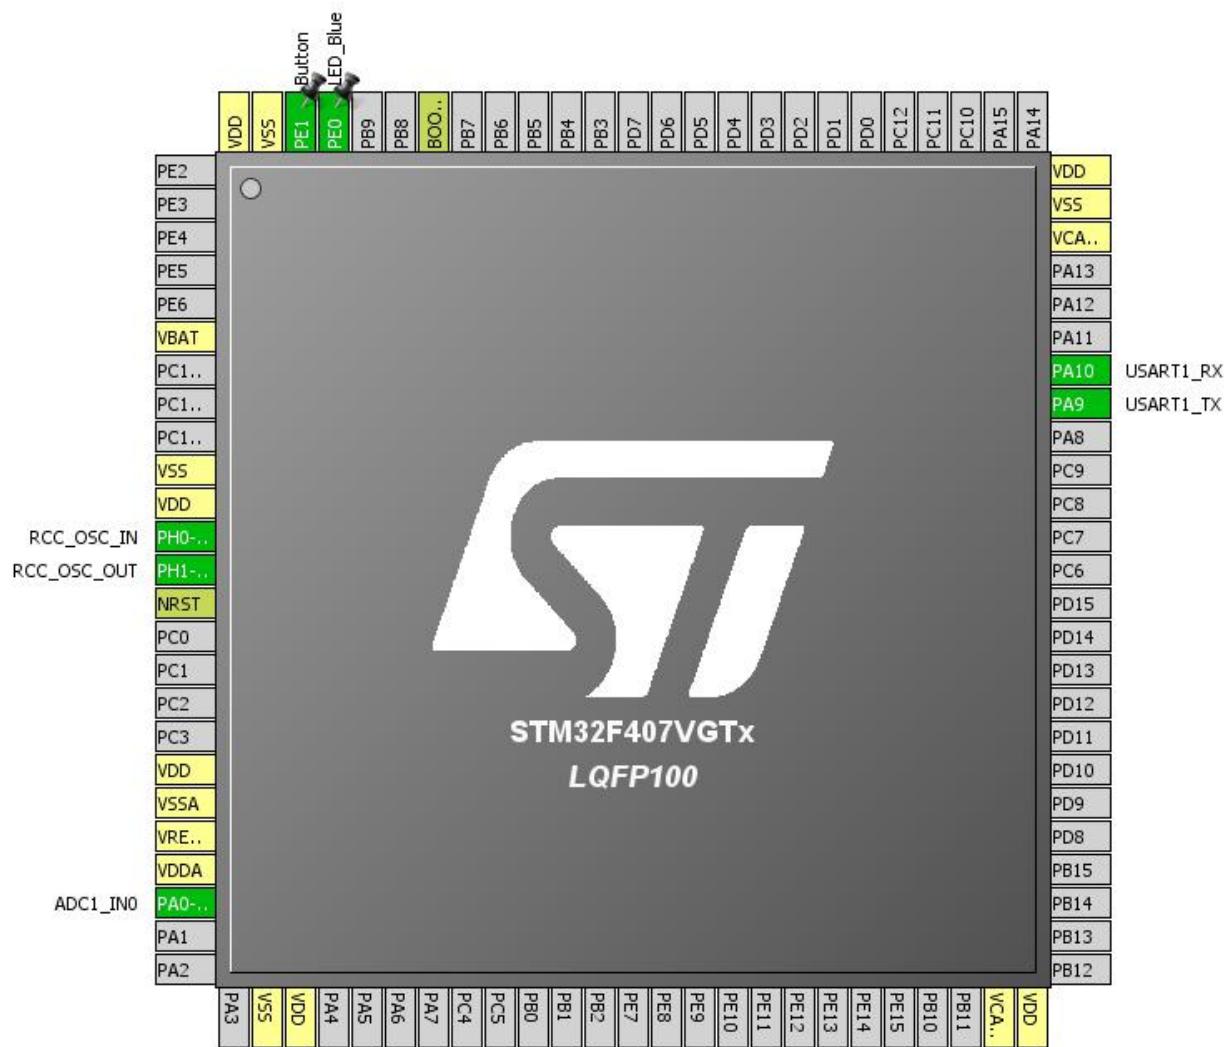


### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	ADC1_IN0	
27	VSS	Power		
28	VDD	Power		
49	VCAP_1	Power		
50	VDD	Power		
68	PA9	I/O	USART1_TX	
69	PA10	I/O	USART1_RX	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
94	BOOT0	Boot		
97	PE0 *	I/O	GPIO_Output	LED_Blue
98	PE1 *	I/O	GPIO_Input	Button
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

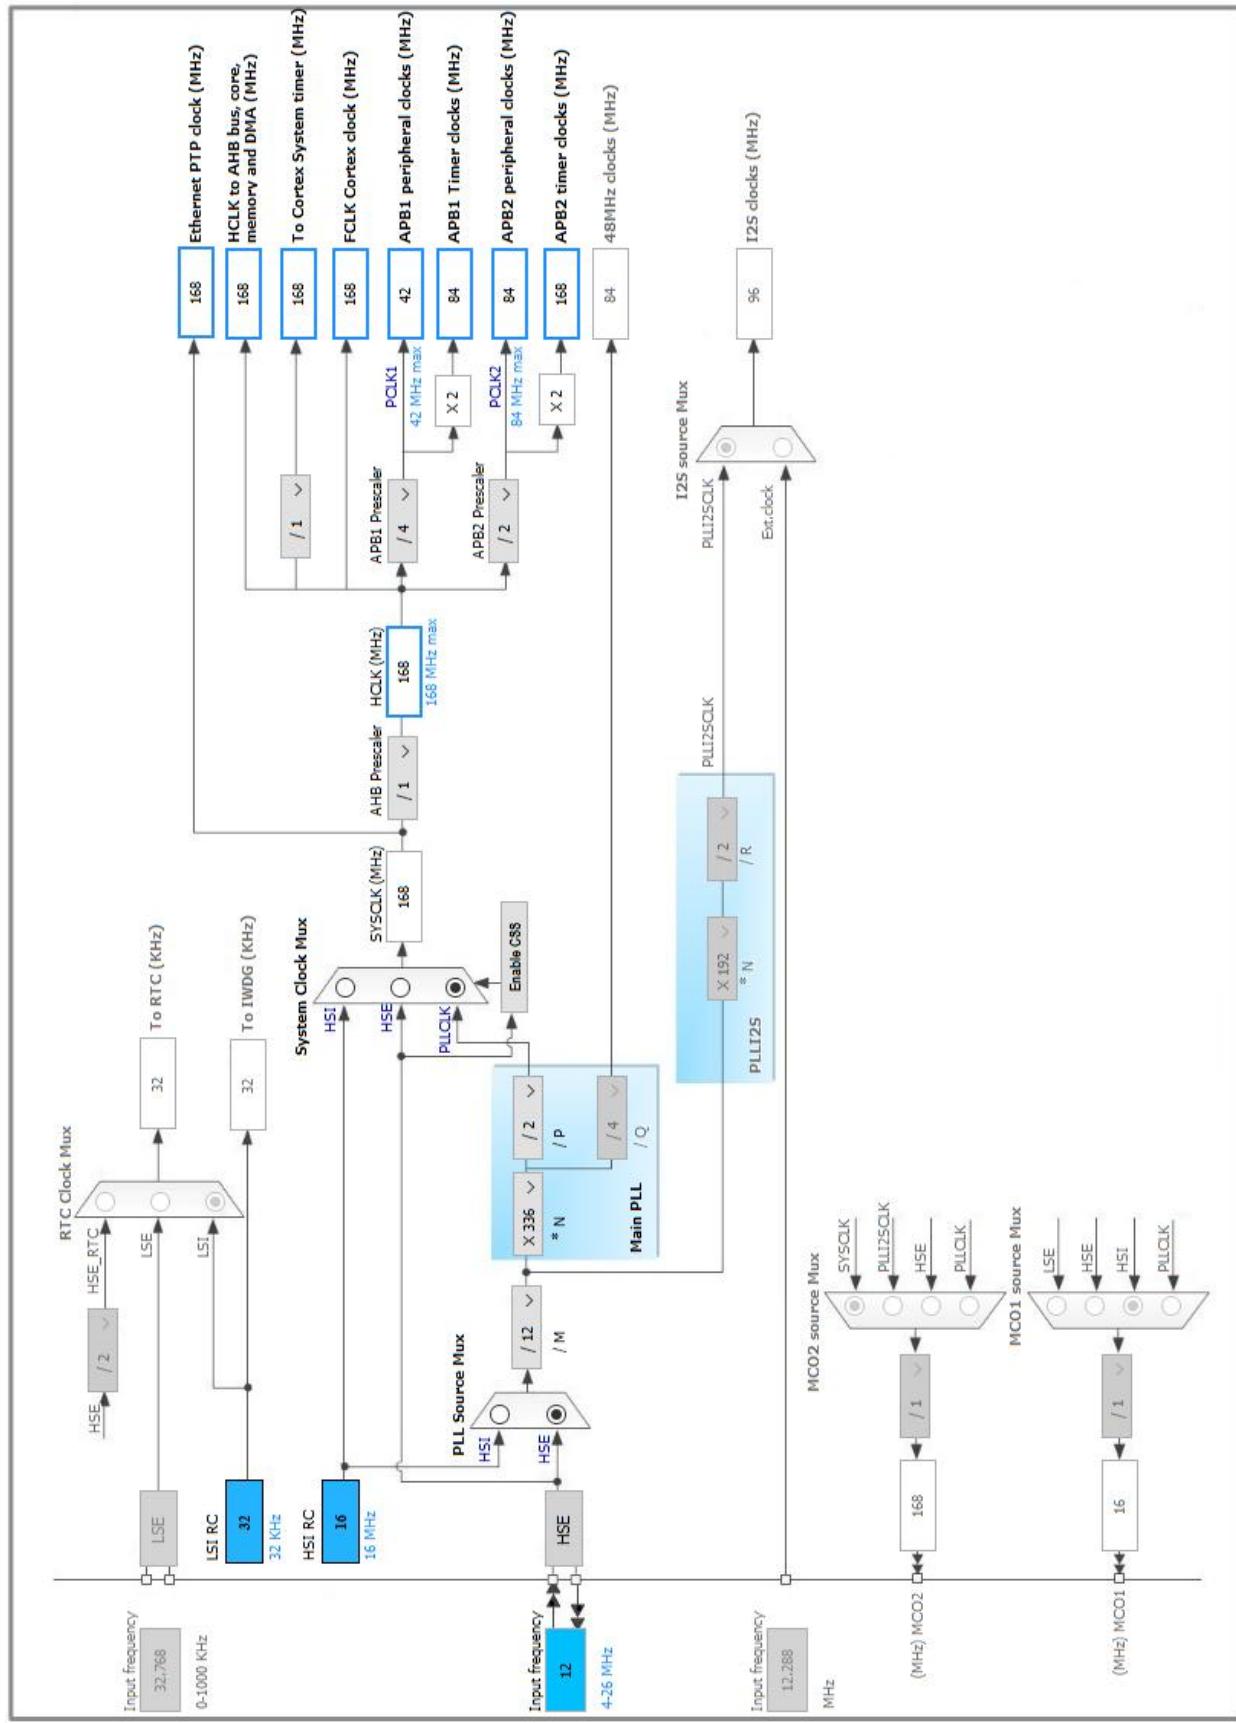

## 5. IPs and Middleware Configuration

### 5.1. ADC1

mode: IN0

#### 5.1.1. Parameter Settings:

##### ADCs\_Common\_Settings:

Mode Independent mode

##### ADC\_Settings:

Clock Prescaler	PCLK2 divided by 4
Resolution	<b>8 bits (11 ADC Clock cycles) *</b>
Data Alignment	Right alignment
Scan Conversion Mode	Disabled
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	EOC flag at the end of single channel conversion

##### ADC-Regular\_ConversionMode:

Number Of Conversion	1
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
<u>Rank</u>	1
Channel	Channel 0
Sampling Time	3 Cycles

##### ADC\_Injected\_ConversionMode:

Number Of Conversions 0

##### WatchDog:

Enable Analog WatchDog Mode false

### 5.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

#### 5.2.1. Parameter Settings:

##### System Parameters:

# LedAndButtonTest Project

## Configuration Report

---

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

## 5.3. SYS

Timebase Source: SysTick

## 5.4. USART1

Mode: Asynchronous

### 5.4.1. Parameter Settings:

#### Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

#### Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	<b>Very High</b> *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	<b>Very High</b> *	
GPIO	PE0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED_Blue
	PE1	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	Button

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USART1 global interrupt	true	0	0
PVD interrupt through EXTI line 16		unused	
Flash global interrupt		unused	
RCC global interrupt		unused	
ADC1, ADC2 and ADC3 global interrupts		unused	
FPU global interrupt		unused	

\* User modified value

## 7. Power Consumption Calculator report

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev7

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	LedAndButtonTest
Project Folder	E:\STM32F4\LedAndButtonTest
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F4 V1.11.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No